


# sepioo D2.6 B

## Technical Details

Dimensions (mm)	80.1 x 40.4 x 13.1 (without LED)
Display technology	Full graphic E-ink display
Active display area (mm)	60.1 x 30.7
Resolution (pixels)	296 x 152
Pixel density	125 dpi
Pixel colors	Black/white or Black/white/red
Protection glass	Yes
Usable pages	12
Casing color	Anthracite
Operating temperature	0°C to +45°
Storage temperature (best for batteries)	-20°C to +50°C +15°C to +30°C
Battery	2x CR2450

Battery lifetime	10 years (7.000-10.000 updates)
Encryption	128-bit AES with secure key exchange
Compliance	CE, ROHS, FCC/IC
Packaging unit	80 labels/box
NFC	Yes, operating frequency: 13.56 MHz
Operating frequency	2.400 – 2.480 GHz, maximum EIRP ≤ 10 mW
LED	1x white / 1x RGB (red/green/ blue/ yellow/ cyan/magenta)
Wireless firmware update	Yes
Buttons	2 Buttons
Protection class	IP65

## Technical Drawing

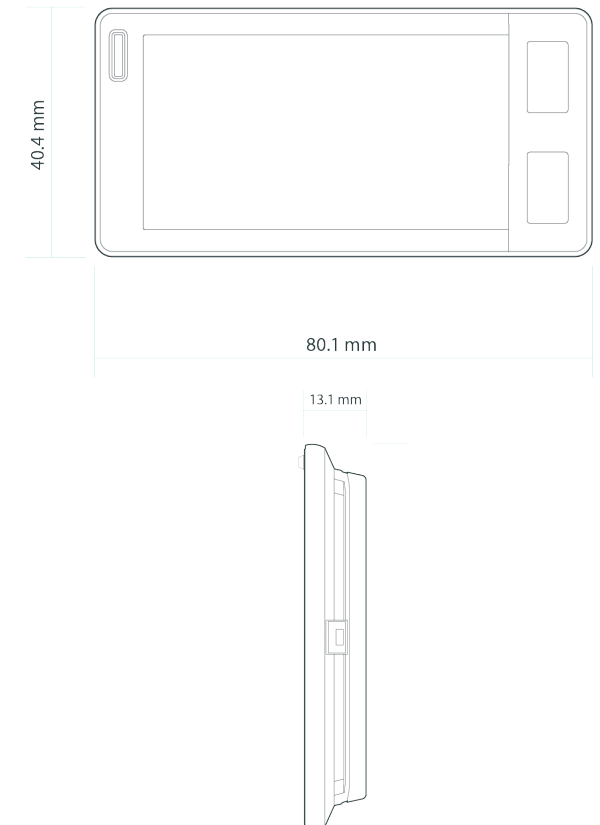

## sepioo D2.6 B



e-shelf-labels | S&K Solutions GmbH

Sailerwöhr 16 | 94032 Passau  
+49 (0) 851 / 2009 30 30

info@e-shelf-labels.com  
www.e-shelf-labels.com

a brand of  solutions

The logo for S&K solutions, featuring the letters "S" and "K" in white inside a blue circle, with the word "solutions" in a smaller font below it.